

ATTENTION: WHEN POWER ON 8 HOURS AFTER SHUTDOWN, IT IS NECESSARY TO SET ZERO


IP67 WATERPROOF DIGITAL CALIPERS

ATTENTION: NO DATA OUTPUT


IP67
WATERPROOF




1126-150

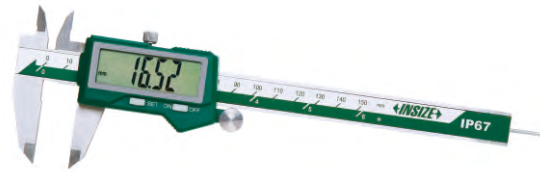

1126-150R

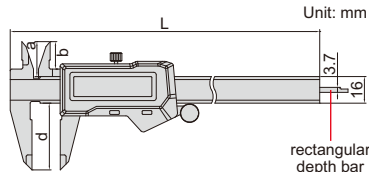

type A

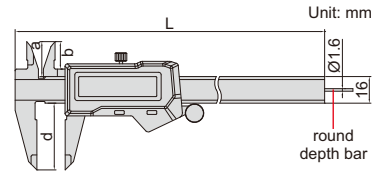

type R

- IP67 dust/waterproof
- Resolution: 0.01mm/0.0005"
- Large display
- Button function: zero, on/off, mm/inch
- Battery CR2032
- Automatic power off
- Meet DIN862
- Made of stainless steel

Code	Range	Accuracy	Type	L	a	b	d	(mm)
1126-150 *	0-150mm/0-6"	±0.03mm	A	234	20	15	40	
1126-200 *	0-200mm/0-8"	±0.03mm	A	286	24	19	50	
1126-300 *	0-300mm/0-12"	±0.03mm	A	390	26	21.5	60	
1126-150R *	0-150mm/0-6"	±0.03mm	R	234	20	15	40	

* Supplied with manufacturer inspection certificate traceable to DKD Germany


ATTENTION: WHEN POWER ON 8 HOURS AFTER SHUTDOWN, IT IS NECESSARY TO SET ZERO

BUILT-IN BLUETOOTH IP67 WATERPROOF DIGITAL CALIPERS


ATTENTION: THE WORKING LIFE OF A BATTERY IS ABOUT 4-6 MONTHS

BLUETOOTH


IP67
WATERPROOF

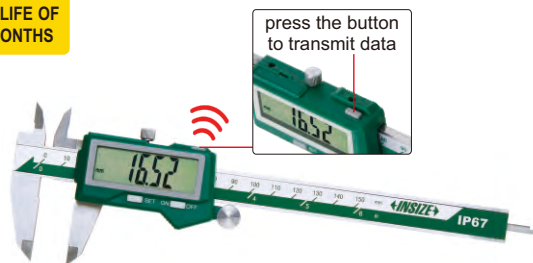


1127-150

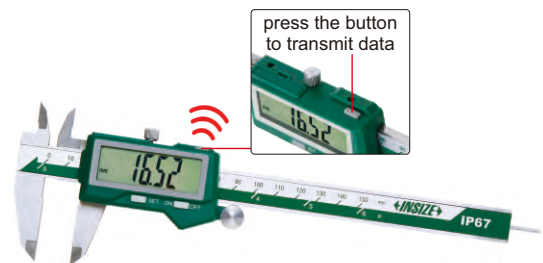

1127-150R

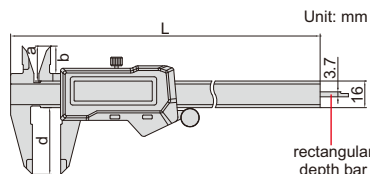

type A

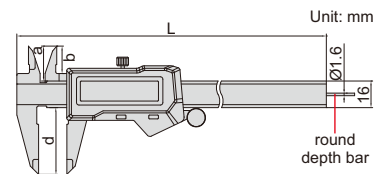

type R

- Built-in bluetooth 4.0 wireless transmission module, connect with computers (with bluetooth receiver), mobile phones, tablets, etc., and output keyboard signals (Transmission distance is 10 meters (under the condition of no obstruction and no electromagnetic interference))
- IP67 dust/waterproof
- Resolution: 0.01mm/0.0005"
- Large display
- Button function: zero, on/off, mm/inch, data transmission
- Battery CR2032, automatic power off
- Meet DIN862
- Made of stainless steel

Code	Range	Accuracy	Type	L	a	b	d	(mm)
1127-150 *	0-150mm/0-6"	±0.03mm	A	234	20	15	40	
1127-200 *	0-200mm/0-8"	±0.03mm	A	286	24	19	50	
1127-300 *	0-300mm/0-12"	±0.03mm	A	390	26	21.5	60	
1127-150R *	0-150mm/0-6"	±0.03mm	R	234	20	15	40	

* Supplied with manufacturer inspection certificate traceable to DKD Germany